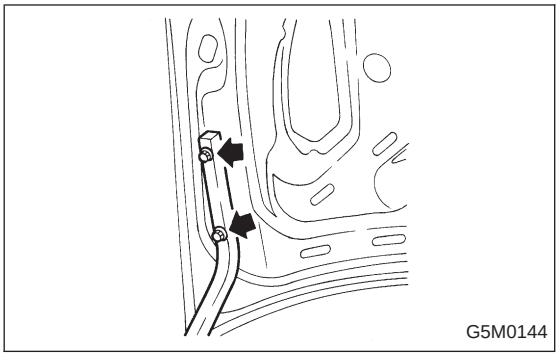

2. Trunk Lid

A: REMOVAL

1. TRUNK LID

1) Open trunk lid.
2) Remove trunk lid mounting bolts and detach trunk lid from hinges.

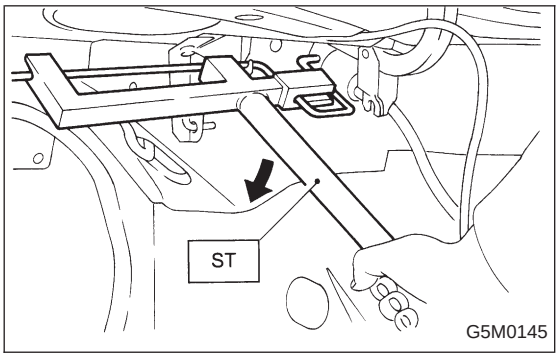

2. TORSION BAR

1) Open trunk lid. Remove torsion bars from hinge links using ST.

ST 927780000 REMOVER

CAUTION:
Be careful because torsion bar quickly swings back when released.

2) Remove the left and right torsion bars.

WARNING:
Be careful because trunk lid drops under its own weight when torsion bars are removed.

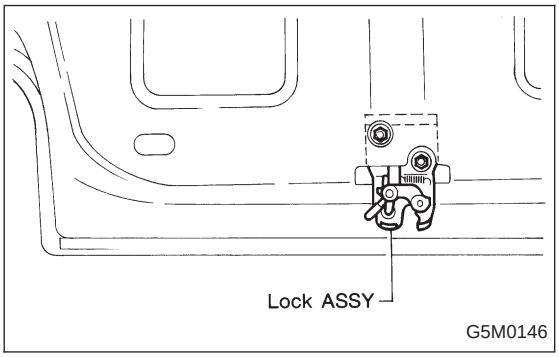

3. TRUNK LID LOCK ASSEMBLY AND KEY CYLINDER

1) Remove rod of lock assembly from rod holder of key lock assembly.
2) Remove nuts which hold lock assembly and remove lock assembly.

NOTE:
- Always remove rear skirt trim panel beforehand, if so equipped.
- Be careful not to bend opener cable.

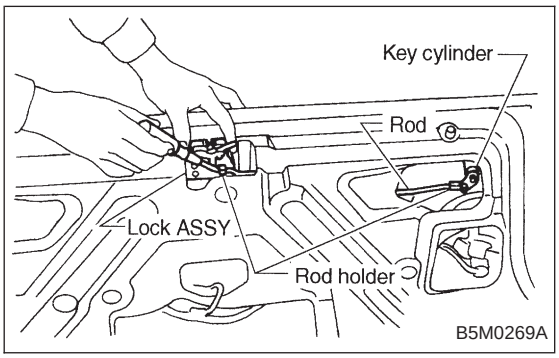

3) Remove rod holder and detach key cylinder from trunk lid.

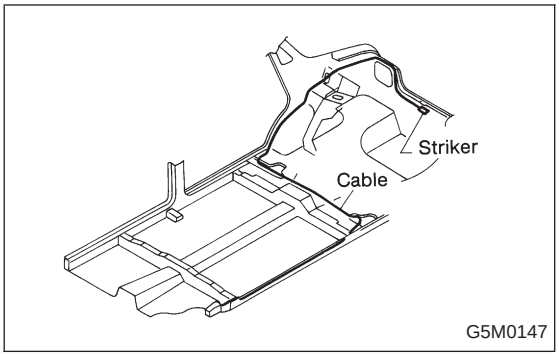

4. TRUNK LID OPENER

1) Remove rear seats, center pillar lower cover, floor mat, rear arch cover and side sill cover (on the driver's side).
2) Remove all clips which hold cable.
3) Disconnect cable from pull handle assembly.
4) Remove bolts and detach pull handle assembly.
5) Loosen bolts which hold lock assembly, and remove it.
6) Remove striker from trunk lid.
7) Disconnect cable from striker.

NOTE:
- Be careful not to bend or break cable.
- Basic model vehicles do not have trunk lid opener system.

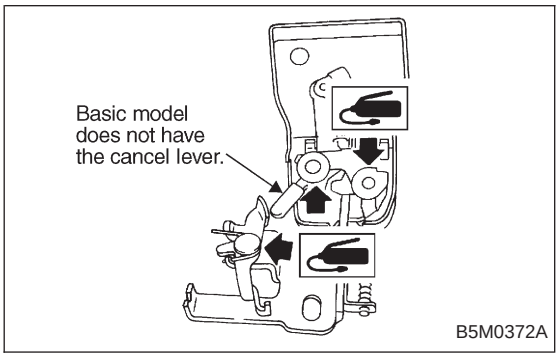

B: INSTALLATION

Installation is in the reverse order of removal.

CAUTION:
- **When installing cover to pull handle assembly, observe the following:**
- **Be careful not to catch harness.**
- **Engage pull handle assembly pawls firmly.**
- **After installing opener cable, ensure it moves smoothly.**
- **Apply a coat of grease to the rotary section of hinges and contact surfaces of torsion bars.**
- **Apply grease to sliding surfaces of lock assembly and striker.**

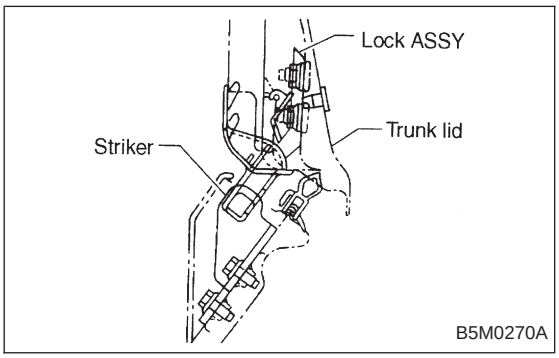

C: ADJUSTMENT

1. TRUNK LID

1) To adjust left-right lid positioning, loosen bolts which hold trunk lid to hinges.
2) To adjust up-down lid alignment, place washer(s) between trunk lid and hinges or move trunk lock assembly up or down.