4. Rear Seat Belt

A: REMOVAL AND INSTALLATION

1. SEDAN MODEL

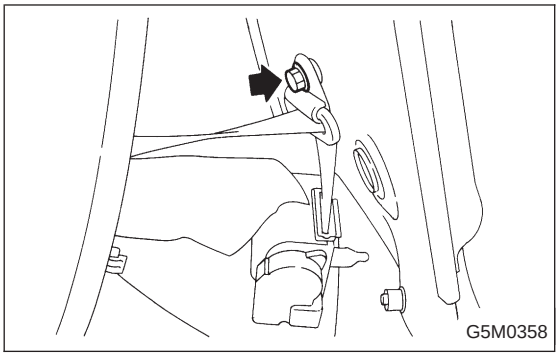

1) Remove rear cushion from vehicle.
2) Remove rear backrest from vehicle.
3) Remove rear pillar upper trim.
4) Remove outer anchor bolts.

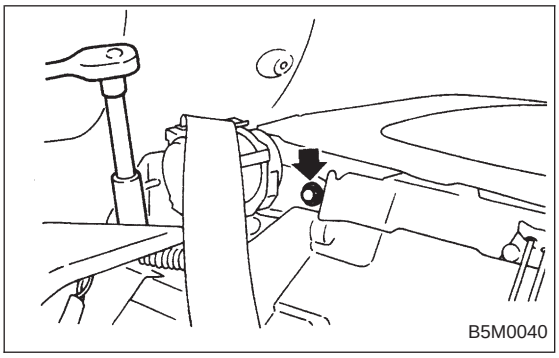

5) Remove ELR.

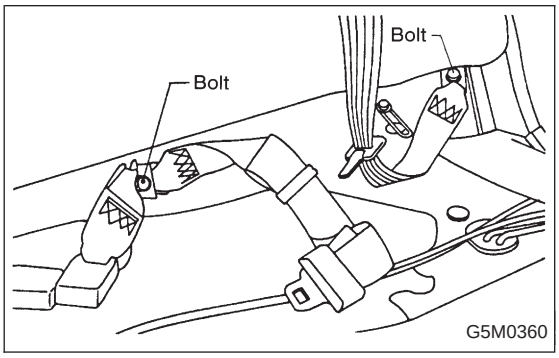

6) Remove anchor bolt of outer belt and then remove outer belt assembly.
7) Remove inner belt.
8) Installation is in the reverse order of removal.

2. WAGON MODEL

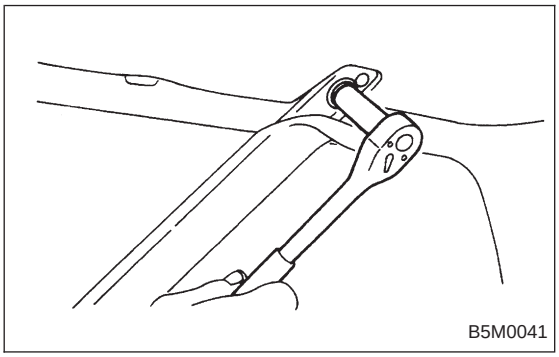

1) Raise rear cushion.
2) Remove shoulder anchor bolt.
3) Remove cap strut.
4) Remove rear quarter upper front trim.

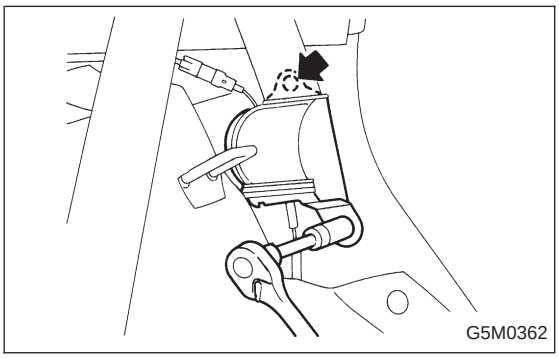

5) Remove ELR assembly.

CAUTION:
Remove outer seat belt and center seat belt in similar manner used to remove those from Sedan model.

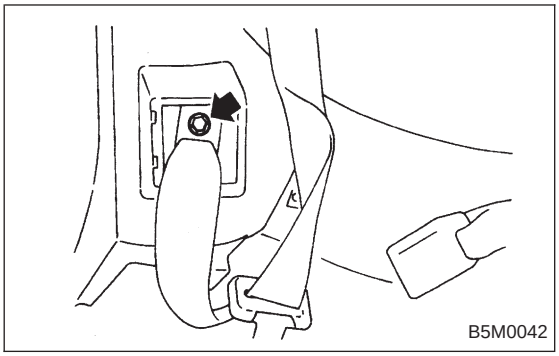

6) Remove lap anchor cover and then remove lower anchor bolt.
7) Remove outer belt assembly.

8) Installation is in the reverse order of removal. Ensure that seat belt is properly reeled on and off after installation of ELR.

CAUTION:
- **Be extremely careful not to confuse center seat anchor plate with outer seat anchor plate during installation.**
- **Ensure that seat belts are free from twisting after installation.**
- **Ensure that tongues, buckles and belts are properly placed on seat.**

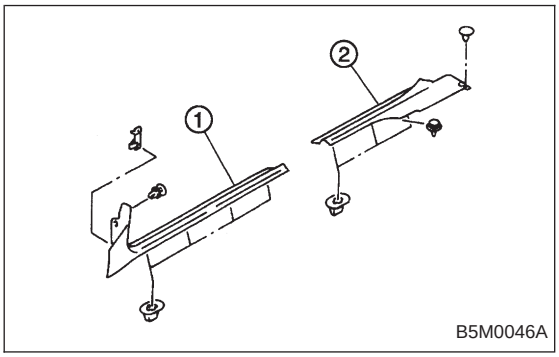

5. Inner Trim Panel

A: REMOVAL AND INSTALLATION

1. SIDE SILL COVER

1) Remove front pillar lower trim ①.
2) Remove side sill rear upper cover trim ②.

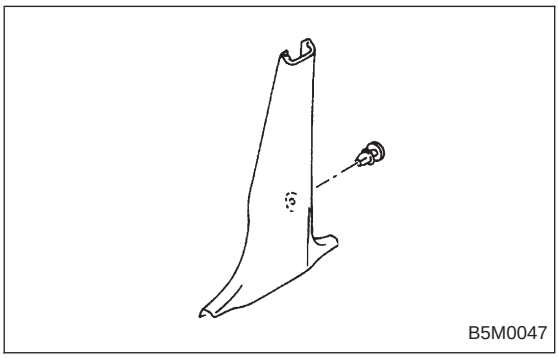

2. CENTER PILLAR LOWER

Remove center pillar lower trim.